Tesla Powerwall 3 Restart Procedure

If Powerwall 3 is unresponsive, it may be necessary to turn off or power cycle the system. Note that power cycling the system must be done in the proper sequence as defined below.

> **Warning**
> On Powerwall 3 systems with additional interconnected solar, always turn off the solar inverter(s) or disconnect the solar source(s) before turning off Powerwall 3.

STEP 01

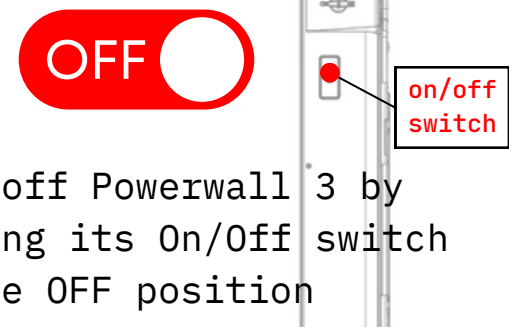

Turn off Powerwall 3 by setting its On/Off switch to the OFF position

STEP 02



Turn off the AC breaker to Powerwall 3

STEP 03

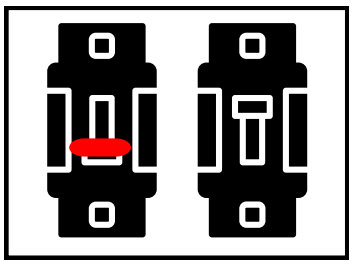

Turn off the AC breaker to the Gateway, if installed (for whole-home backup systems, this may be a breaker inside the Gateway)

STEP 04

Wait for at least one hour

STEP 05



Turn the AC breakers back ON

STEP 06



Turn ON Powerwall 3

Tesla Powerwall 3 Restart Procedure

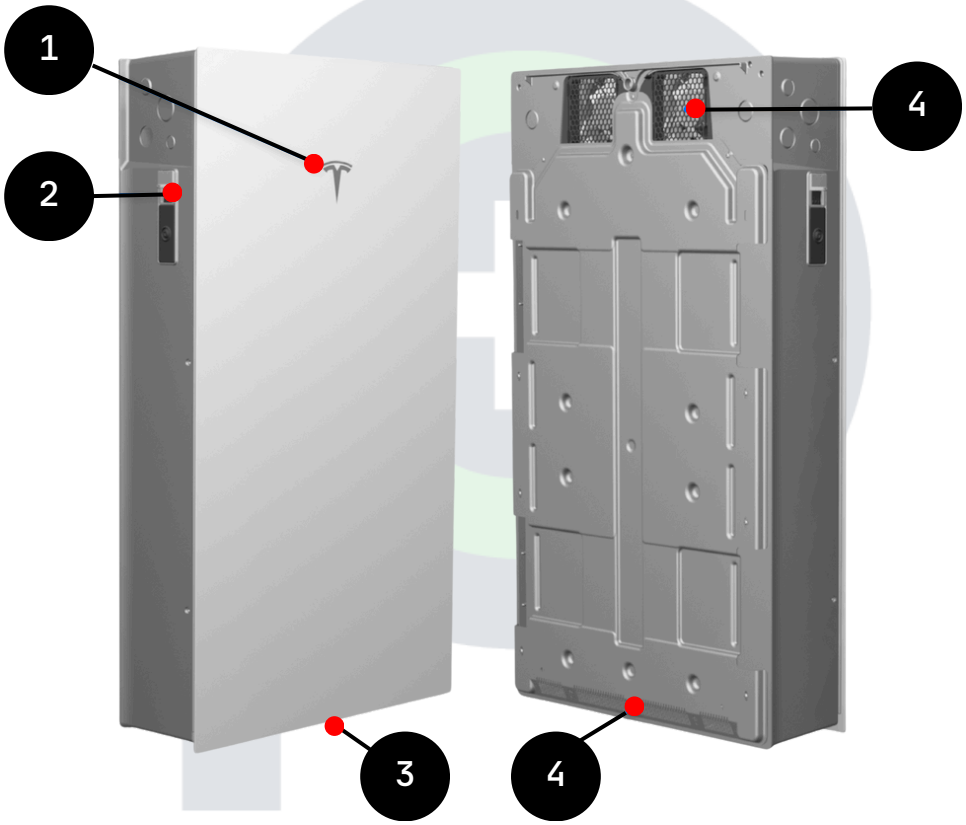

Component	Name
1	LED Indicator
2	ON/OFF Switch
3	Air Intake
4	Air Exhaust